




Product of the Month

www.ashgrovepkg.com

Issue #41 • May 2013

KolorStone® Classic

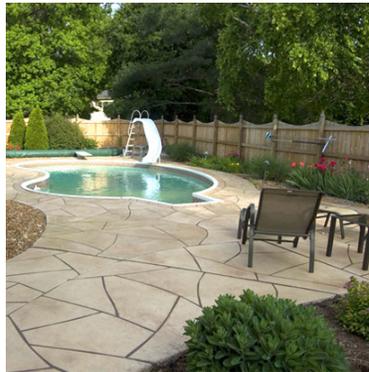

Ash Grove® Kolorstone® Classic is specifically designed to create architectural cement finishes on a variety of surfaces.

Kolorstone® Classic is used with Kolorstone® Kolor Flex. Kolorstone® Classic is the dry component found in the Kolorstone® Kits.

Kolorstone® Classic is a uniformly blended mixture of Portland cement, graded silica sands and proprietary ingredients.

Kolorstone® Classic is available for purchase individually on its own in 40 lb. bags. Ash Grove Kolorstone® Classic has several advantages including polymer modified, tenacious bond, freeze/thaw resistant, cost effective and extremely tough.

Kolorstone® is recommended for construction or repair of resurfacing sidewalks, driveways, patios, steps and swimming pools.



2013 Skills USA

The 2013 Skills USA competition was held April 12th at Hastings, NE. Thanks to Scott F, Scot K, Brad K, Mark C, Randy W, and John for helping and judging this year's event. Look for a new location for the competition in 2014.

Features, Benefits & Procedures

When using Kolorstone® Classic use clean tools and clean buckets with clean mixing equipment.

A Kolorstone® Kit consists of the 40 lb. Kolorstone® Classic and a 1 gallon Kolorstone® Kolorflex liquid. When mixing pour the Kolorflex admixture first into a clean bucket and then add the Kolorstone® Classic slowly. Mix until a good uniform consistency is achieved. Do not over mix.

Allow the mixture to slake (stand) for three to four minutes and remix. This "resting" time allows the chemicals and pigments to reach their full potential. Keep the mixing of materials consistent to achieve consistent results.

Curing is not needed under normal weather conditions. If temperatures or winds are high, placing Kraft paper over the coating will aid in curing. Do not damp cure or mist the coating as it will wash out the color. Do not add water to the mixture.

One 40 lb. bag of Kolorstone® Classic yields approximately 2/3 cu. ft., approximately 100 square feet when used as a base coat and 60-80 square feet or more when used as a finish (depending on applied texture).



*Product of the Month for June:
Kolorflex Admixture*

Special Points of Interest:

- ACI Golf Outing May 6th, Iron Horse, Ashland, NE
- AIA & AIA Affiliate Golf Outing May 31st, Quarry Oaks, Ashland, NE
- Memorial Day, May 27th